



Pipe Technical Data Sheet

	8" DR 25 Fusible C-900®	8" DR 25 B&S PVC
Pipe Material	Fusible C-900®	B&S PVC
Nominal Diameter (in)	8	8
Dimension Ratio	DR 25	DR 25
Series	DIPS	DIPS
Pressure Rating (PSIG)	165	165
Bell/Coupling OD (in)	N/A	11.75
Outside Diameter (in)	9.05	9.05
Inside Diameter (in)	8.28	8.28
Cross Sectional Flow Area (in ²)	53.9	53.9
Bend Radius (LF)	189	N/A
Tensile Strength (PSIG)	7,000	7,000
Safe Pulling Force (lbs)	27,600	N/A
Safe Pulling Stress (PSIG)	2,800	N/A
Relaxation Period (hrs)	0	0
Hydrostatic Design Basis (PSIG)	4,000	4,000
Critical Buckling Pressure (PSIG)	68	68
Connection to Host Pipe	Standard Mechanical Joint	Standard Mechanical Joint
Material Weight (lbs/ft)	6.5	6.7

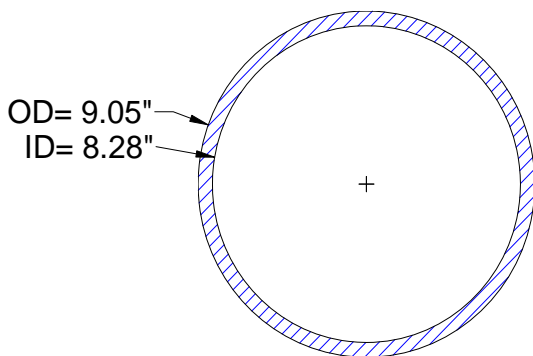

8" DR 25 Fusible C-900®

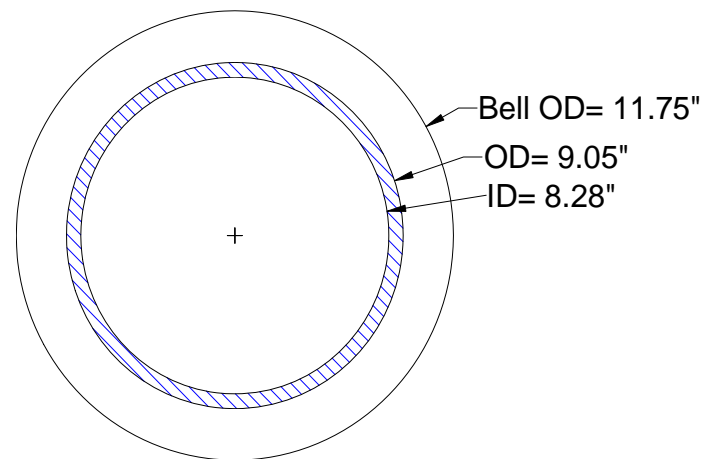

8" DR 25 B&S PVC